





The photograph may not match the reference exactly. Please read the product description to identify the finish.

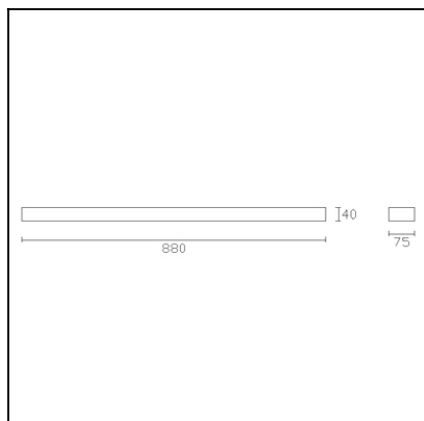

TECHNICAL CHARACTERISTICS


Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	96 x LED 16W Warm White - 3000K 1405 lm ^(N) CRI 80
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 Years
Units per box:	8
Net Weight (Kg):	1.11
EAN:	8435111097991



MATERIALS / FINISHES

Structure material:	Extruded aluminium	Diffuser material:	Polycarbonate
Structure finish:	Chrome	Diffuser finish:	Matt opal

Download photometric file .ldt / .ies

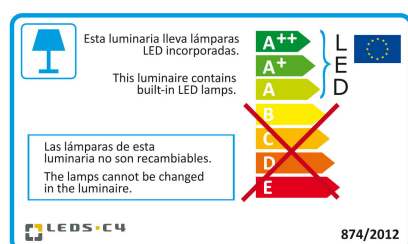

Click on image to download energy label

GEAR

Gear included: Yes, electronic

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


Leds-c4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.
Please consult the sales team to clarify any doubt.

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

Luminaire			Measur.			Lamp		
Code	05-1508-21-M1		Code	05-1508-21-M1		Code	05-1508-21-M1	
Name	Aplique leds 16W cálido opal		Name	Aplique led 16W cálido opal		Number	1	
Line	- LEDS C4 LEDS		Date	09-04-2013		Position	Universal	
Efficiency			100.00%	Coordinate system		CG	Total Flux	616.50 lm
Maximum value			100.46 cd	Position		C=0.00 G=40.00	Double Symmetrical	
Rectangular Luminaire			Length	880 mm	Width	38 mm	Height	78 mm
Rectangular Luminous Area			Length	866 mm	Width	38 mm	Height	37 mm
Horizontal Luminous Area			0.032908 m2		Emitting area on Plane 180°		0.032042 m2	
Emitting area on Plane 0°			0.032042 m2		Emitting area on Plane 270°		0.001406 m2	
Emitting area on Plane 90°			0.001406 m2		Glare area at 76°		0.039051 m2	
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		180	
Measurement Distance			6.44		Measurement Flux		616.50 lm	
Operator			Asselum T2		Source voltage		230.00 V	
Temperature			20.00 °C		Source current		PRC	
Humidity			53.00 %		Photocell			
Notes								

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
- LEDS C4 LEDS	05-1508-21-M1	Lámpara led blanco cálido16W	616.50	16.00	1
C.I.E.	32 60 83 70 100	D DIN 5040	B21		
F UTE	0.70 H + 0.30 T	B NBN	BZ 7 / 0.8 / BZ 6		

880mm x 38mm

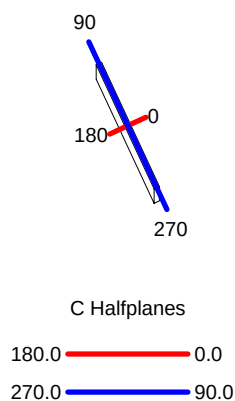

ULOR 30.06 %

DLOR 69.94 %

RN 30.06 %

