
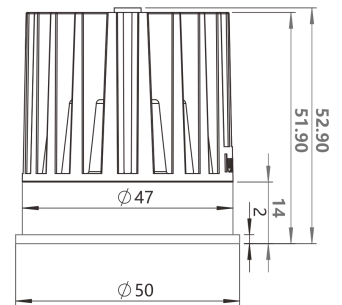


## PowerLUX-6.3W

Reflector+Lens

### Technical Parameters:

Name	PowerLUX7
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	350mA (18V)
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Dimmability:	Dimmable Optional
Weight:	0.10KG/pc 11.8KG/CTN 100pcs/CTN 580x300x200mm



### Ordering Information:

○ White

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
6.3W	>90	▲ 15°	579.2 lm	2700K	○	LUX-30615-M0727
			642.8 lm	3000K	○	LUX-30615-M0730
			698.3 lm	4000K	○	LUX-30615-M0740
		▲ 40°	579.5 lm	2700K	○	LUX-30640-M0727
			640.1 lm	3000K	○	LUX-30640-M0730
			702.3 lm	4000K	○	LUX-30640-M0740
		▲ 60°	582.7 lm	2700K	○	LUX-30660-M0727
			641.8 lm	3000K	○	LUX-30660-M0730
			708.4 lm	4000K	○	LUX-30660-M0740

# PowerLUX7





## Technical Data test pattern

CRI90 15°

2700K

3000K

4000K

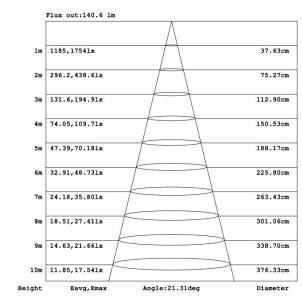
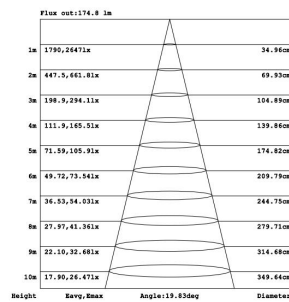
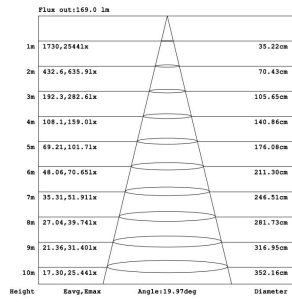
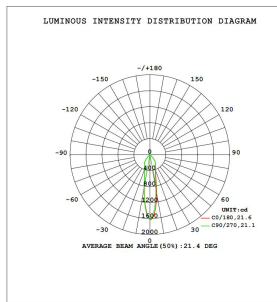


CRI90 40°

2700K

3000K

4000K

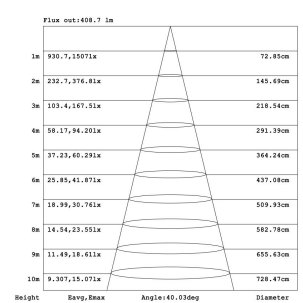
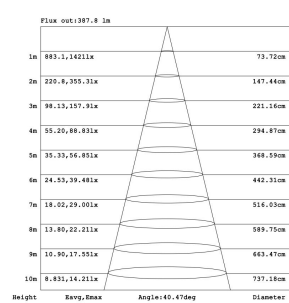
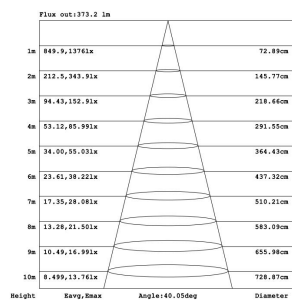
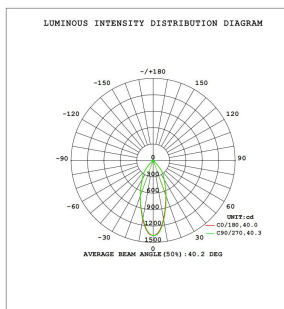


CRI90 60°

2700K


3000K

4000K

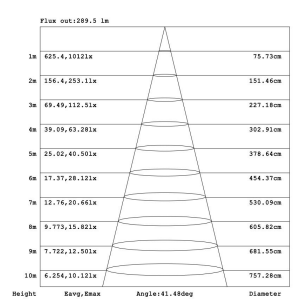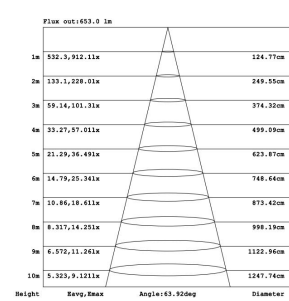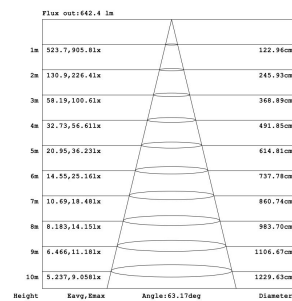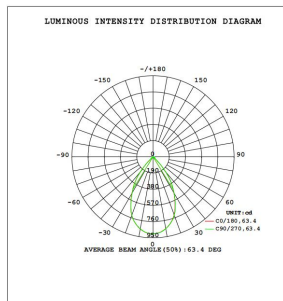

# PowerLUX7

## Installation instruction

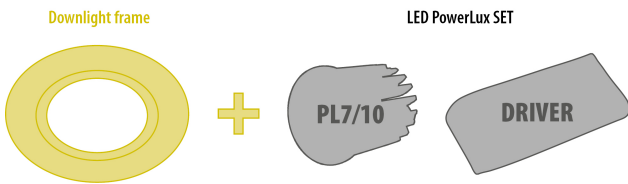

### Packaging:



#### Box

L52\*W52\*H76mm  
1pc/box  
GW: 0.1kg/box

#### Middle box

L282\*W111\*H82mm  
10pc/box  
GW: 1.05kg/box

#### Outer carton

L580\*W300\*H200mm  
100pcs/CTN  
GW: 11.8kg/carton

